

highest QUALITY state of the ART CUSTOMIZED PRECISION WBS / WBS-F

CARATTERISTICHE - SPECIFICATIONS


		WBS	WBS-F
IN	DIAMETER	3/8 BSP	3/8 BSP
	PRESS.	Min. -0.1 bar - 1.5 PSI	1 bar 15 PSI
		Max. 6 bar 87 PSI	6 bar 87 PSI
TEMP.	Max. 60° C. 140° F.		
OUT	DIAMETER	3/8 BSP	
SHAFT		24 mm	
OIL	SAE 75W 90	0.5 litri - 0.13 U.S.G.	
PESO WEIGHT	Kg / lbs	5.8 / 12.8	



OPTIONAL



PIEDINI cod. 02.9829.97.3 (optional)
 MOUNTING RAILS KIT cod. 02.9829.97.3 (optional)
 KIT SUPPORTS cod. 02.9829.97.3 (option)
 JUEGO DE PIES cod. 02.9829.97.3 (opción)

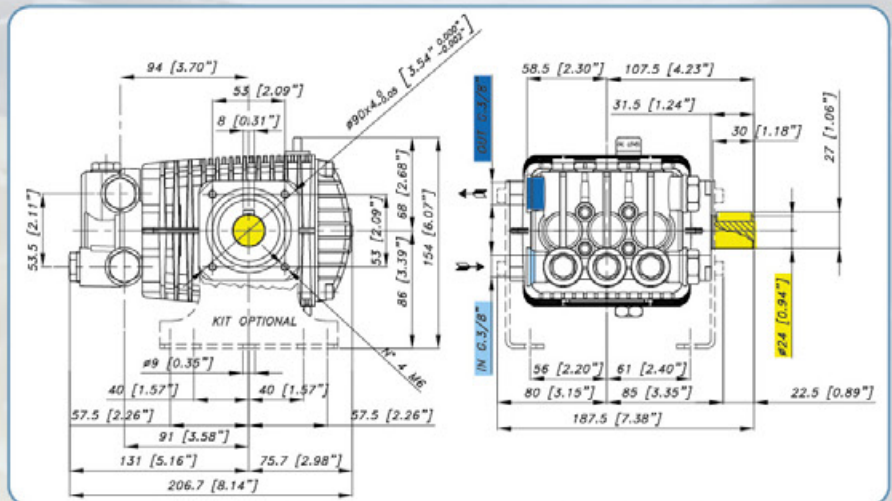

WBS 1725 rpm

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

CODICE PART NR.	MODELLO MODEL	PRESS MAX / MAX PRESSURE		PORTATA / FLOW		POTENZA / POWER		PIST. PLUNG. Dia. mm	CORSA STROKE mm
		Bar	PSI	L/min	GPM	KW	HP		
02.6090.97.3	WBS 1520	105	1500	7.6	2	1.5	2.0	15	8.6
02.6091.97.3	WBS 1920	130	1900	7.6	2	1.8	2.5		
02.6092.97.3	WBS 2320	160	2300	7.6	2	2.2	3.0		
02.6093.97.3	WBS 1832	125	1800	12.2	3.2	2.9	3.9	18	10
02.6094.97.3	WBS 2532	175	2500	12.2	3.2	4.0	5.4		
02.6095.97.3	WBS 1735	115	1700	13.2	3.5	3.0	4.0	18	10.8
02.6096.97.3	WBS 2335	160	2300	13.2	3.5	4.0	5.3		

WBS-F 3450 rpm

02.6110.97.3	WBS 1421-F	95	1400	8	2.1	1.5	2.0	15	4.8
02.6111.97.3	WBS 1821-F	125	1800	8	2.1	1.9	2.5		
02.6112.97.3	WBS 2121-F	145	2100	8	2.1	2.2	2.9		
02.6113.97.3	WBS 1335-F	90	1300	13	3.4	2.2	3.0	15	8
02.6114.97.3	WBS 1735-F	115	1700	13	3.4	3.0	4.0		
02.6115.97.3	WBS 2235-F	150	2200	13	3.4	3.8	5.1		