

customized highest state
PRECISION QUALITY OF THE ART
highest customized
TMH QUALITY PRECISION




CARATTERISTICHE - SPECIFICATIONS

| | | | |
|--------------------|-----------------|-------------------------|-----------------------|
| IN | DIAMETER | \varnothing | 1/2 BSP |
| | PRESS. | Min. | - 0.1 bar - 1.5 PSI |
| | | Max. | 6 bar 87 PSI |
| | TEMP. | Max. | 60° C. 140° F. |
| OUT | DIAMETER | \varnothing | 3/8 BSP |
| SHAFT | | \varnothing | HOLLOW 1" 1/8 |
| OIL | | SAE 75W 90 | 0.7 litri 0.18 U.S.G. |
| PESO WEIGHT | | Kg lbs | 10.8 / 23.7 |

M NEMA 184TC-1"1/8



OPTIONAL

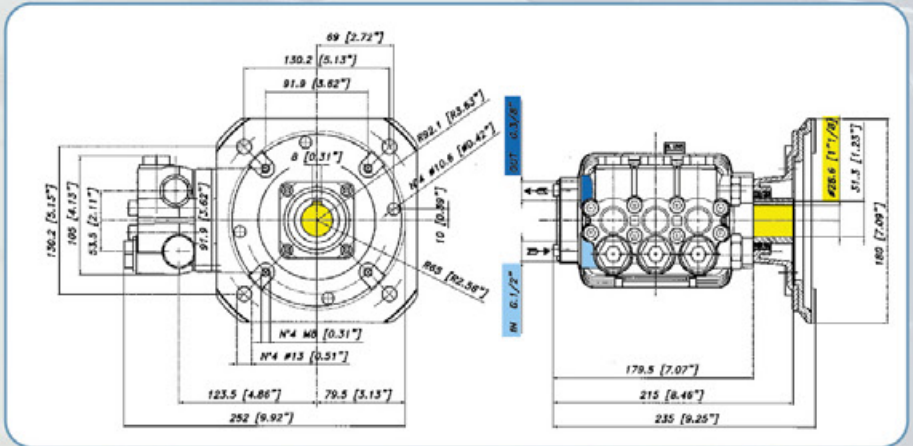

TMH 1725 rpm

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

| CODICE PART NR. | MODELLO MODEL | PRESS MAX / MAX PRESSURE | | PORTATA / FLOW | | POTENZA / POWER | | PIST. PLUNG. Dia. mm | CORSA STROKE mm |
|--------------------|------------------|--------------------------|------|----------------|-----|-----------------|-----|----------------------------|-----------------------|
| | | Bar | PSI | L/min | GPM | KW | HP | | |
| 07.1300.97.A | TMH 3036 | 210 | 3000 | 13.2 | 3.5 | 5.5 | 7.5 | 18 | 11.2 |
| 07.1301.97.A | TMH 3040 | 210 | 3000 | 15.2 | 4 | 5.9 | 8 | 18 | 12.4 |
| 07.1302.97.A | TMH 2250 | 150 | 2200 | 18.9 | 5 | 5.5 | 7.5 | 18 | 15.4 |
| 07.1303.97.A | TMH 3050 | 210 | 3000 | 18.9 | 5 | 7.4 | 10 | | |
| 07.1304.97.A | TMH 1955 | 130 | 1900 | 20.8 | 5.5 | 5.5 | 7.5 | 18 | 17 |
| 07.1305.97.A | TMH 3055 | 210 | 3000 | 20.8 | 5.5 | 8.1 | 11 | | |