


# RBS

# NEW

# ART

## CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	∅	1" BSP
	PRESS.	Min.	-0.1 bar - 1.5 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	74° C. 165° F.	
OUT	DIAMETER	∅	3/8 BSP
SHAFT		∅	30 mm
OIL	SAE 75W90		1.5 litri 0.4 U.S.G.
PESO WEIGHT	Kg/lbs		20.5 / 45.2

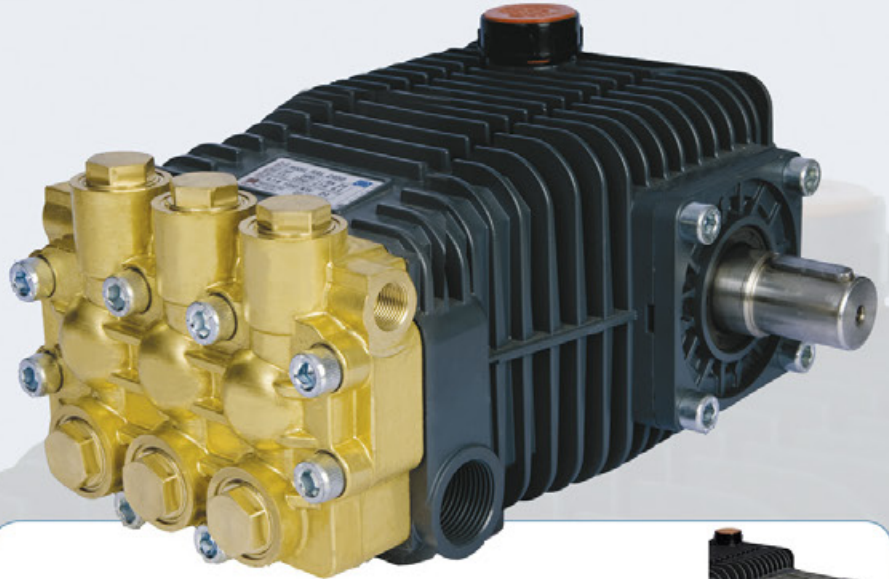

FLANGIA CON GIUNTO ELASTICO PER MOTORI IDRAULICI (vedi pag. 76)

BELL HOUSING + FLEXIBLE COUPLING FOR HYDRAULIC MOTORS (see page 76)

BRIDE AVEC ACCOUPLEMENT ELASTIQUE POUR MOTEURS HYDRAULIQUES (voir page 76)


BRIDA CON JUNTA ELÁSTICA PARA MOTORES HIDRAULICOS (véase pág. 76)



INTELLISEAL™



KIT PIEDINI cod. 08.9829.97.3 (optional)  
 MOUNTING RAILS KIT cod. 08.9829.97.3 (optional)  
 KIT SUPPORTS cod. 08.9829.97.3 (option)  
 JUEGO DE PIES cod. 08.9829.97.3 (opción)

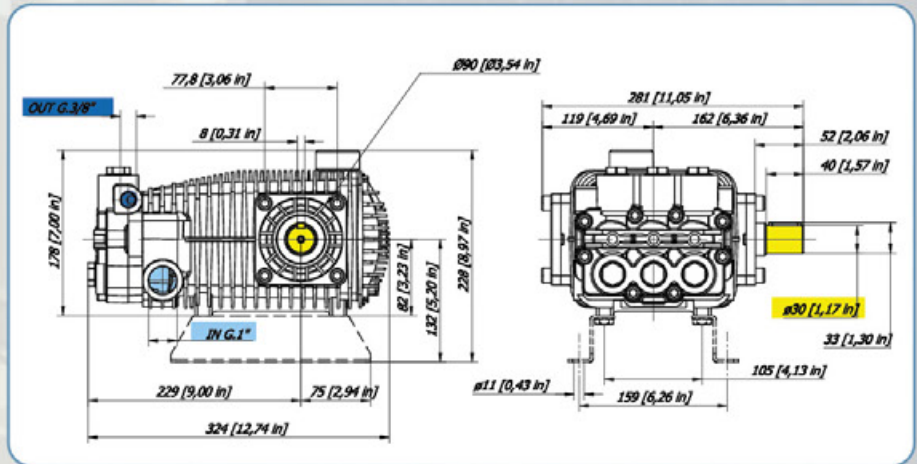

## CARATTERISTICHE - FEATURES

## PERFORMANCE CHART

MODELLO MODEL CODICE PART NR.	MAX		PRESS		RPM 700				RPM 850				RPM 1000				PIST. PLUNG. Dia. mm	CORSA STROKE mm
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	KW	HP		
RBS 2335 08.1087.97.3	23.0	6.1	250	3625	16.4	4.3	8.1	10.8	19.7	5.2	9.7	13.0	23.0	6.1	11.3	15.1	22	21
			300	4350	16.3	4.3	9.6	12.9	19.6	5.2	11.6	15.5	22.9	6.0	13.5	18.1		
			350	5075	16.2	4.3	11.2	15.0	19.5	5.2	13.4	18.0	22.7	6.0	15.6	21.0		
RBS 2735 08.1088.97.3	27.3	7.2	250	3625	19.5	5.2	9.6	12.9	23.5	6.2	11.5	15.5	27.3	7.2	13.4	18.0	22	25
			300	4350	19.4	5.1	11.4	15.3	23.4	6.2	13.8	18.5	27.2	7.2	16.0	21.5		
			350	5075	19.3	5.1	13.3	17.8	23.2	6.1	16.0	21.4	27.1	7.2	18.6	24.9		