

WBC / WBC-F

CARATTERISTICHE - SPECIFICATIONS


		WBC	WBC-F
IN	DIAMETER	3/8 BSP	3/8 BSP
	PRESS.	Min. -0.1 bar -1.5 PSI	1 bar 15 PSI
		Max. 6 bar 87 PSI	6 bar 87 PSI
TEMP.	Max. 60° C. 140° F.		
OUT	DIAMETER	3/8 BSP	
SHAFT		HOLLOW 24 mm	
OIL	SAE 75W 90	0.5 litri 0.13 U.S.G.	
PESO WEIGHT	Kg / lbs	6 / 13.2	



M IEC 90 B14-24mm



OPTIONAL

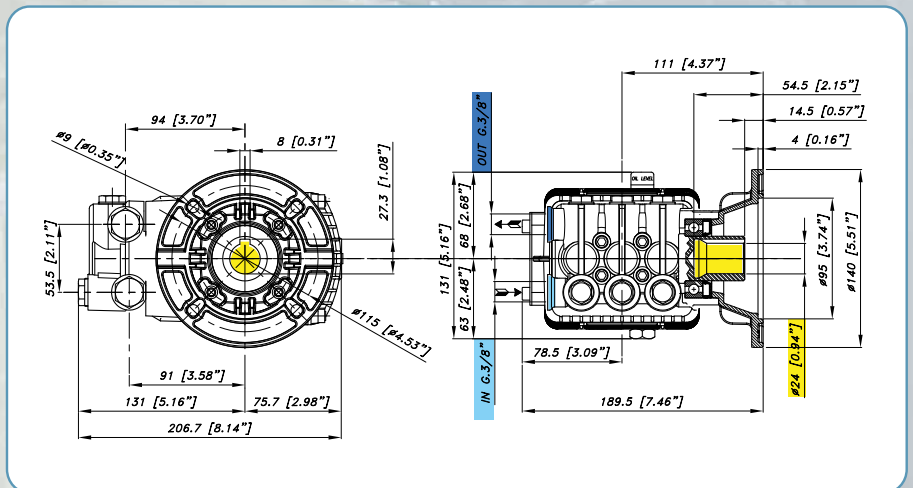

CARATTERISTICHE - FEATURES

WBC 1450 rpm

PERFORMANCE CHART

CODICE PART NR.	MODELLO MODEL	PRESS MAX / MAX PRESSURE		PORTATA / FLOW		POTENZA / POWER		PIST. PLUNG. Dia. mm	CORSA STROKE mm
		Bar	PSI	L/min	GPM	KW	HP		
02.6051.97.3	WBC 911	110	1600	9	2.3	1.8	2.4	18	8
02.6052.97.3	WBC 1111	110	1600	11	2.9	2.2	3.0	18	10
02.6053.97.3	WBC 1312	120	1750	13	3.4	3.0	4.0	18	12.4

WBC-F 2800 rpm

02.6060.97.3	WBC 812-F	120	1750	8	2.1	1.9	2.5	15	6
02.6061.97.3	WBC 814-F	140	2000	8	2.1	2.2	2.9		
02.6062.97.3	WBC 1114-F	140	2000	11	2.9	2.9	3.9	15	8
02.6063.97.3	WBC 1411-F	110	1600	14	3.7	2.8	3.8		
02.6064.97.3	WBC 1415-F	150	2200	14	3.7	3.8	5.1	15	10