


# highest quality state of the art CUSTOMIZED PRECISION TML-F


## CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	$\varnothing$	1/2 BSP
	PRESS.	Min.	1 bar 15 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	$\varnothing$	3/8 BSP
SHAFT		$\varnothing$	24 mm
OIL		SAE 75W 90	0.7 litri 0.18 U.S.G.
PESO WEIGHT		Kg / lbs	9.5 / 21

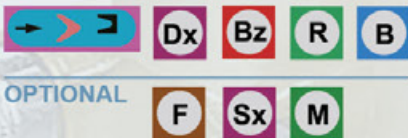

OPTIONAL

KIT PIEDINI cod. 07.9802.97.3 (optional)  
MOUNTING RAILS KIT cod. 07.9802.97.3 (optional)  
KIT SUPPORTS cod. 07.9802.97.3 (option)  
JUEGO DE PIES cod. 07.9802.97.3 (opción)

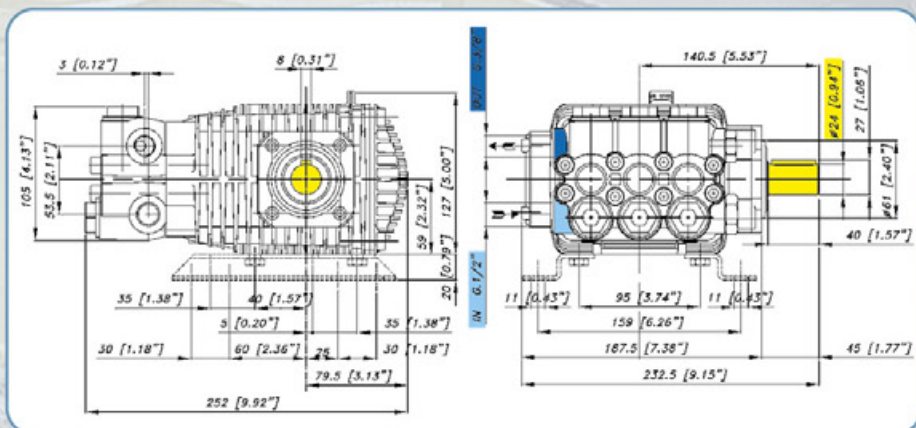

## CARATTERISTICHE - FEATURES

## PERFORMANCE CHART

MODELLO MODEL CODICE PART NR.	MAX		PRESS		RPM 1450				RPM 2800				RPM 3450				PIST. PLUNG. Dia. mm	CORSA STROKE mm
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	KW	HP		
TML 1528-F 07.1101.97.A	18.0	4.8	210	3045	8.2	2.2	3.4	4.5	15.3	4.0	6.3	8.4	18.0	4.8	7.4	9.9	15	11.2
			250	3625	8.1	2.1	4.0	5.3	15.2	4.0	7.5	10.0	17.9	4.7	8.8	11.8		
			280	4060	8.1	2.1	4.4	6.0	15.1	4.0	8.3	11.1	17.8	4.7	9.8	13.1		
TML 1728-F 07.1104.97.A	19.9	5.3	210	3045	9.0	2.4	3.7	5.0	16.9	4.5	7.0	9.4	19.9	5.3	8.2	11.0	15	12.4
			250	3625	9.0	2.4	4.4	5.9	16.8	4.4	8.3	11.1	19.8	5.2	9.7	13.0		
			280	4060	9.0	2.4	4.9	6.6	16.7	4.4	9.2	12.3	19.7	5.2	10.8	14.5		
TML 2028-F 07.1106.97.A	24.1	6.4	210	3045	10.9	2.9	4.5	6.0	20.5	5.4	8.4	11.3	24.1	6.4	9.9	13.3	15	15
			250	3625	10.9	2.9	5.3	7.2	20.4	5.4	10.0	13.4	24.0	6.3	11.8	15.8		
			280	4060	10.8	2.9	6.0	8.0	20.3	5.4	11.1	14.9	23.9	6.3	13.1	17.6		