

# TML-HW


Versioni Acqua calda 85°C  
Hot water versions 185°F

## CARATTERISTICHE - SPECIFICATIONS

|             |          |                   |                       |
|-------------|----------|-------------------|-----------------------|
| IN          | DIAMETER | ∅                 | 1/2 BSP               |
|             | PRESS.   | Min.              | -0.1 Bar -1.5 PSI     |
|             |          | Max.              | 6 bar 87 PSI          |
| TEMP.       | Max.     | 85° C 185° F H.W. |                       |
| OUT         | DIAMETER | ∅                 | 3/8 BSP               |
| SHAFT       |          | ∅                 | 24 mm                 |
| OIL         |          | SAE 75W 90        | 0.7 litri 0.18 U.S.G. |
| PESO WEIGHT |          | Kg / lbs          | 10 / 22               |



INTELLiseal H.W.™

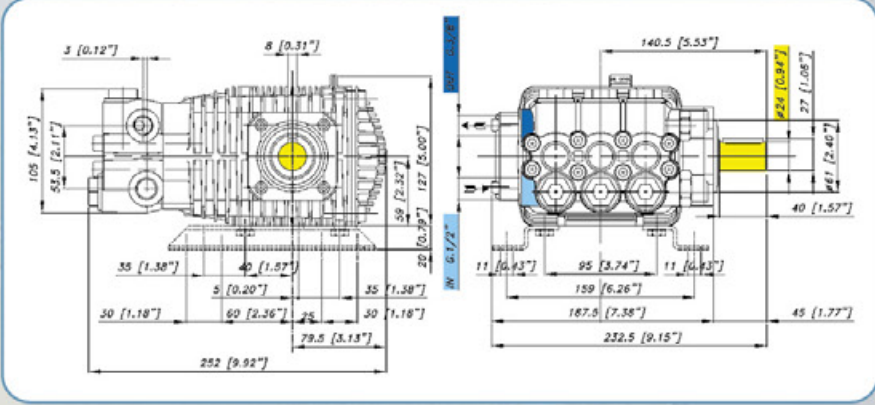

## CARATTERISTICHE - FEATURES

TML - H.W.

## PERFORMANCE CHART

| MODELLO MODEL<br>CODICE PART NR. | MAX   |     | PRESS |      | RPM 950 |     |     |     | RPM 1450 |     |     |     | RPM 1725    |     |      |     | PIST.<br>PLUNG.<br>Dia. mm | CORSA<br>STROKE<br>mm |
|----------------------------------|-------|-----|-------|------|---------|-----|-----|-----|----------|-----|-----|-----|-------------|-----|------|-----|----------------------------|-----------------------|
|                                  | L/min | GPM | Bar   | PSI  | L/min   | GPM | KW  |     | L/min    | GPM | KW  | HP  | L/min       | GPM | KW   | HP  |                            |                       |
| TML 1328- HW<br>07.1034.97.A     | 15.3  | 4.1 | 100   | 1450 | 8.6     | 2.3 | 1.7 | 2.3 | 13.1     | 3.5 | 2.6 | 3.4 | 15.3        | 4.1 | 3.0  | 4.0 | 18                         | 12.4                  |
|                                  |       |     | 150   | 2175 | 8.5     | 2.2 | 2.5 | 3.4 | 13.0     | 3.4 | 3.8 | 5.1 | 15.2        | 4.0 | 4.5  | 6.0 |                            |                       |
| TML 1528- HW<br>07.1035.97.A     | 17.8  | 4.7 | 100   | 1450 | 10.0    | 2.6 | 2.0 | 2.6 | 15.3     | 4.1 | 3.0 | 4.0 | 17.8        | 4.7 | 3.5  | 4.7 | 18                         | 14.4                  |
|                                  |       |     | 150   | 2175 | 9.9     | 2.6 | 2.9 | 3.9 | 15.1     | 4.0 | 4.5 | 6.0 | 17.6        | 4.6 | 5.2  | 7.0 |                            |                       |
| TML 1728- HW<br>07.1036.97.A     | 19.8  | 5.2 | 100   | 1450 | 11.1    | 2.9 | 2.2 | 2.9 | 17.3     | 4.6 | 3.3 | 4.4 | 19.8        | 5.2 | 3.9  | 5.2 | 18                         | 16                    |
|                                  |       |     | 150   | 2175 | 11.0    | 2.9 | 3.2 | 4.3 | 17.1     | 4.5 | 4.9 | 6.6 | 19.5        | 5.2 | 5.8  | 7.7 |                            |                       |
| TML 2028- HW<br>07.1037.97.A     | 23.1  | 6.1 | 100   | 1450 | 13.0    | 3.4 | 2.6 | 3.4 | 20.2     | 5.3 | 4.0 | 5.3 | 23.1        | 6.1 | 4.5  | 6.1 | 18                         | 18.7                  |
|                                  |       |     | 150   | 2175 | 12.8    | 3.4 | 3.8 | 5.1 | 20.1     | 5.2 | 5.9 | 7.9 | 22.8        | 6.0 | 6.7  | 9.0 |                            |                       |
| TML 2120- HW<br>07.1038.97.3     | 24.4  | 6.5 | 100   | 1450 | 13.7    | 3.6 | 2.7 | 3.6 | 21.3     | 5.6 | 4.2 | 5.6 | 24.4        | 6.5 | 4.8  | 6.4 | 20                         | 16                    |
|                                  |       |     | 150   | 2175 | 13.6    | 3.6 | 4.0 | 5.4 | 21.1     | 5.5 | 6.2 | 8.3 | 24.3        | 6.4 | 7.2  | 9.6 |                            |                       |
| TML 2420- HW<br>07.1039.97.3     | 24.2  | 6.4 | 100   | 1450 | 16.0    | 4.2 | 3.1 | 4.2 | 24.2     | 6.4 | 4.8 | 6.4 | N.D.<br>N.A | 20  | 18.7 |     |                            |                       |
|                                  |       |     | 150   | 2175 | 15.9    | 4.2 | 4.7 | 6.3 | 24.1     | 6.4 | 7.1 | 9.5 |             |     |      |     |                            |                       |